

PIEZORESISTIVE PRESSURE TRANSMITTERS

ABSOLUTE AND GAUGE PRESSURE

This transmitter is well suited for use in industrial applications that require good accuracy and high stability. It is designed especially for safety critical applications where media compatibility is paramount. The Series 23S / 25S features a fully welded pressure port construction, no internal O-Rings or seals are used up to 600 bar. The wetted materials are a 316L stainless steel housing and a brazed diaphragm.

- **Series 23 S** Male pressure port G1/4"
Accuracy 0,25 %FS (best straight line), optional 0,1 %FS
- **Series 25 S** G1/2" pressure port with flush diaphragm
Accuracy 0,25 %FS (best straight line), optional 0,1 %FS

A Comprehensive Range

Absolute, barometric, gauge (positive and negative pressures). 16 nominal pressure ranges. Current or voltage output.

Flexibility

A modular concept is used, with fast and economical production achieved by using off-the-shelf Series 7 S and 9 S capsules and Series 6 S sensors.

Numerous options and variations are available to meet customers' specific requirements: Pressure ranges, pressure ports, signal outputs, electrical connectors, etc.

Quality


Each transmitter is subjected to severe test- and calibration procedures. Transmitters are manufactured and tested according to ISO 9001:2000.



Series 23 S



Series 25 S

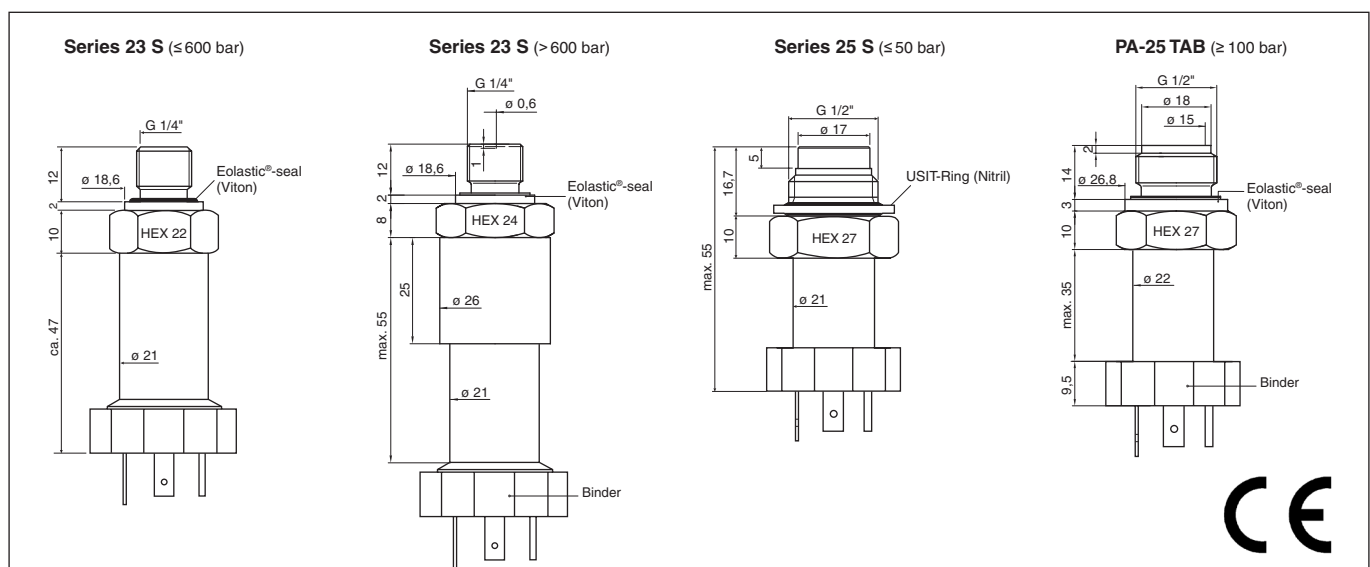

Subject to alterations

04/07

KELLER AG für Druckmesstechnik
KELLER Ges. für Druckmesstechnik mbH

St. Gallerstrasse 119
Schwarzwaldstrasse 17

CH-8404 Winterthur
D-79798 Jestetten

Tel. +41 (0)52 - 235 25 25
Tel. +49 (0)7745 - 9214 - 0

Fax +41 (0)52 - 235 25 00
Fax +49 (0)7745 - 9214 - 60



KELLER

Specifications

Pressure Ranges (FS) in Bar																	
PR-23 S / PR-25 S G1/2"	-1	-0,5	-0,2	0,2	0,5	1	2	5	10	20							
PAA-23 S / PAA-25 S G1/2"						0,5	1	2	5	10	20						
PA-23 S							1	2	5	10	20	50	100	200	400	600	1000
PA-25 S / PA-25 TAB G1/2"							1	2	5	10	20	50	100	200	400		
Overpressure	-1	-1	-1	2,5	2,5	3	4	10	20	40	100	200	300	600	900	1200	
PAA: Absolute. Zero at vacuum PA: Sealed Gauge. Zero at 1000 mbar abs PR: Vented Gauge. Zero at atmospheric pressure																	
Linearity ⁽¹⁾ + Hysteresis + Repeatability				± 0,25 %FS				± 0,5 %FS (Range ≤ 1 bar)				(1) best straight line					
Storage-/Operating Temperature				-40...100 °C													
Compensated Temperature Range				-10...80 °C													
Temperature Coefficients				of Zero, in %FS/°C				of Sensitivity, in %/°C									
· Range > 1 bar				0,005 typ.				0,01 max.				0,02 max.					
· Range 1 bar				0,010 typ.				0,02 max.				0,02 max.					
· Range 0,5 bar				0,015 typ.				0,03 max.				0,02 max.					
· Range 0,2 bar				0,025 typ.				0,05 max.				0,02 max.					
Stability																	
· Range > 2 bar				0,1 %FS typ.				0,2 %FS max.									
· Range ≤ 2 bar				2 mbar typ.				4 mbar max.									
Signal Output / Type				4...20 mA / 2-Wire				0...5 V / 3-Wire*				0...10 V / 3-Wire*					
Supply				8...28 VDC				8...28 VDC				13...28 VDC					
Load Resistance (Ω)				(U-10 V) / 0,02 A				> 5 k				> 5 k					
Frequency Response				5 kHz				1 kHz				1 kHz					
Power Consumption								max. 5 mA				max. 5 mA					
Electrical Connector				Plug DIN 43650													
Dead Volume Change				< 0,1 mm ³													
Material in Media Contact				Stainless steel 316L (DIN 1.4435), hard solder													
Protection Class				IP65													
Weight				Series 23 S: ≈ 105 g Series 25 S: ≈ 115 g													
Insulation				> 100 MΩ@500 V													
Endurance				> 10 million cycles, 0...100 %FS at 25 °C													
Oil Filling				Silicone fluid													


* Signal at zero for 0...5 V (0...10 V transmitters)

5V/10V

+50 mV

1%FS


FS

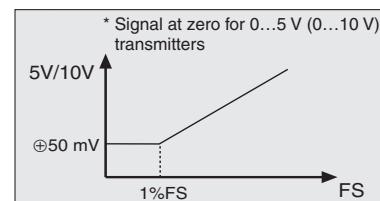

Options

Pressure Port	On request.
Electrical Output	Cable, other plug connections.
Pressure Ranges	On request.
Oil Filling	Fluorocarbon oil (O ₂ -compatible), olive-oil, low temperature oil.

Also available in Ex-version; see separate data sheet 23(S)Ei / 25(S)Ei / 26 Ei.

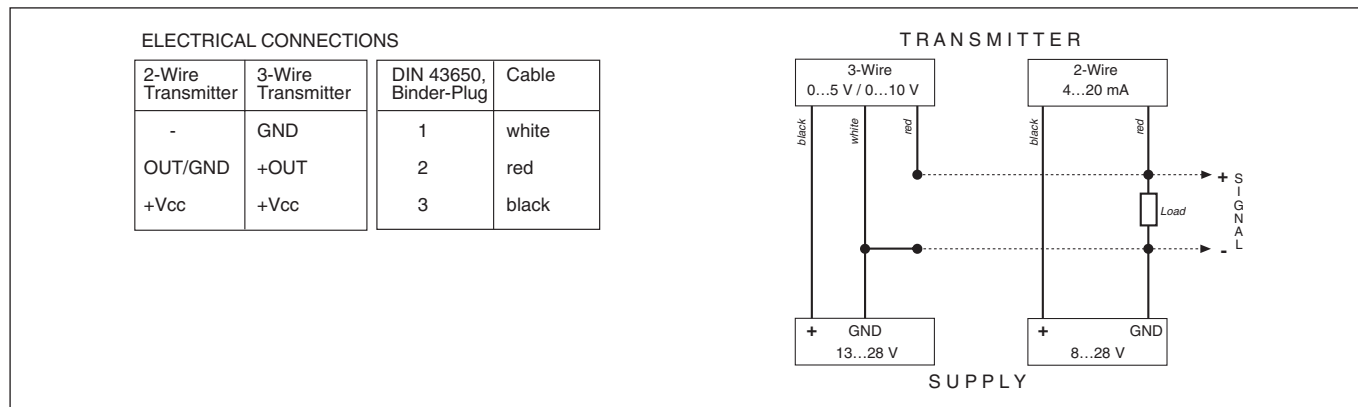

Subject to alterations

04/07

KELLER AG für Druckmesstechnik
KELLER Ges. für Druckmesstechnik mbH

St. Gallerstrasse 119
Schwarzwaldstrasse 17

CH-8404 Winterthur
D-79798 Jestetten

Tel. +41 (0)52 - 235 25 25
Tel. +49 (0)7745 - 9214 - 0

Fax +41 (0)52 - 235 25 00
Fax +49 (0)7745 - 9214 - 60

Companies approved to ISO 9001:2000

www.keller-druck.com